



Technical Data Sheet

Epilight™ 6661 Phthalocyanine Dye

DESCRIPTION

Recommended for ruby/diode laser

Suitable for injection molding

Suitable for laminates

Suitable for coatings

PROPERTIES

Absorption maximum, λ max: 669 nm

Absorptivity in acetone: 82 L g⁻¹ cm⁻¹

Appearance: blue powder


Solubility in grams/100 grams of solvent:

Ethanol 20 grams

MEK 30 grams

Ethyl Acetate 2 grams

Toluene 5 grams

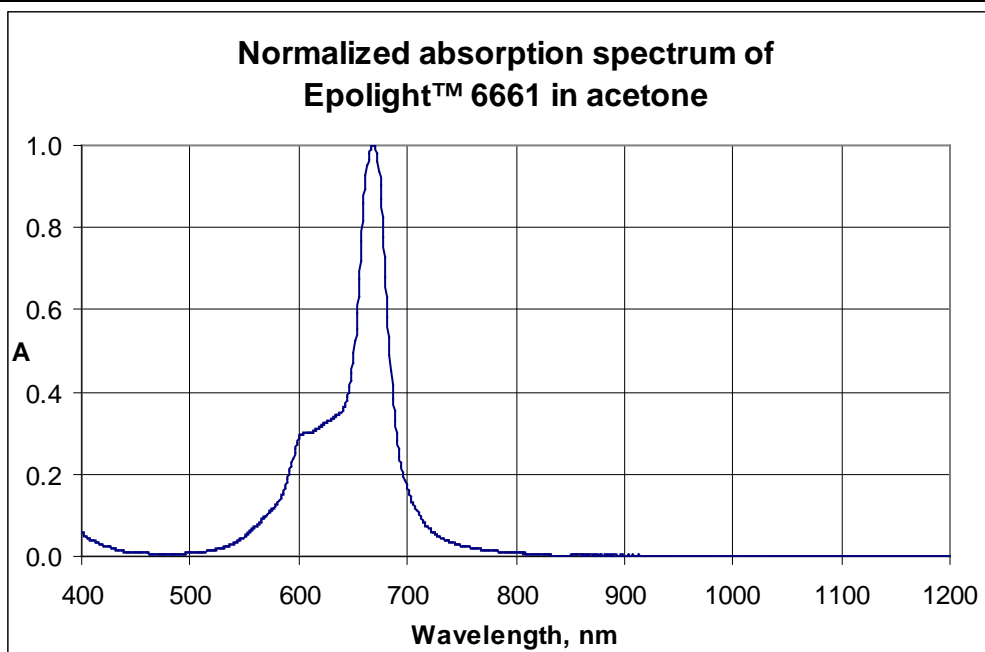

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.