



Technical Data Sheet

Epolight™ 6698 Phthalocyanine Dye

DESCRIPTION

Excellent visible light transmission

Excellent thermal stability

Suitable for injection molding

Recommended for ruby laser

Very good solar stability

PROPERTIES

Absorption maximum, lambda max: 699 nm

Absorptivity in chloroform: 280 L g⁻¹ cm⁻¹


Appearance: blue powder

Melting point: > 300 C

Solubility in grams/100 grams of solvent:

Methylene chloride 2.3 grams

Acetone 0.04 grams

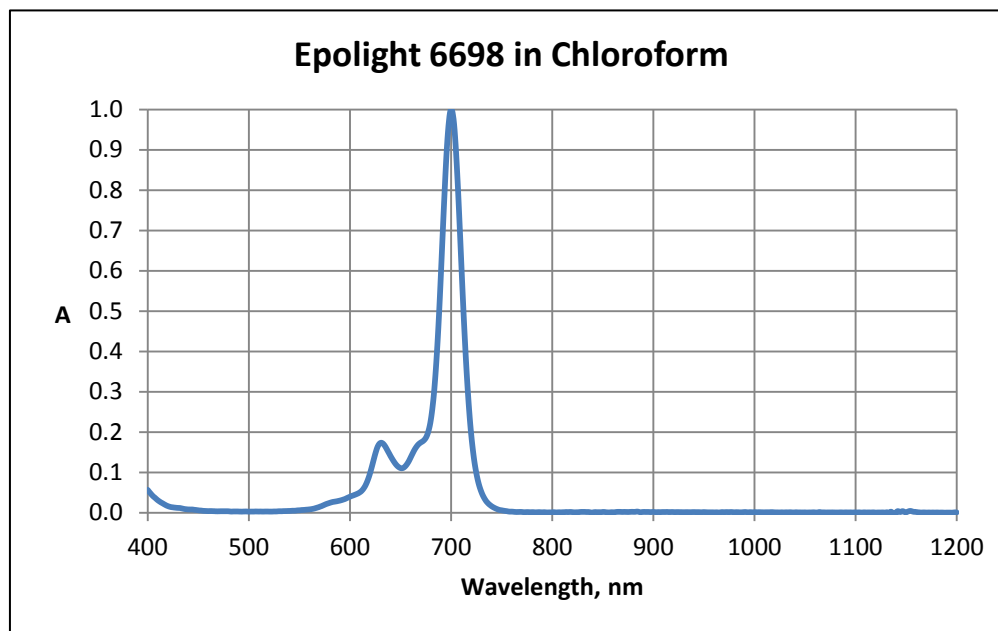

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.