

Technical Data Sheet

Epilight™ 5397 Visible Light Dye

DESCRIPTION

Suitable for injection molding

Suitable for coatings

Mild fluorescence

Thermally stable

PROPERTIES

Absorption maximum, λ max: 596 nm

Absorptivity in acetone: $134 \text{ L g}^{-1} \text{ cm}^{-1}$

Appearance: violet powder


Melting point: 217 - 220°C

Solubility in grams/100 grams of solvent:

MEK 8.93 grams

Xylene 0.8 gram

Cyclohexanone 5.62 grams

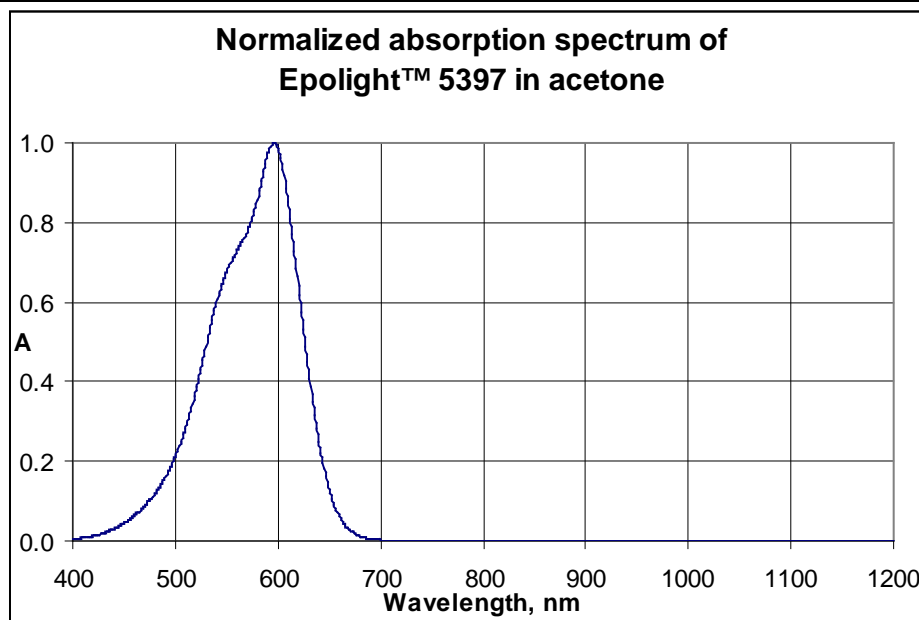

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.