

# Technical Data Sheet

## Epilight™ 5532 Visible Light Dye

### DESCRIPTION

Recommended for KTP/Nd:YAG doubled laser

Suitable for injection molding

### PROPERTIES

Absorption maximum,  $\lambda$  max: 500 nm

Absorptivity in acetone: 28 L g<sup>-1</sup> cm<sup>-1</sup>

Appearance: red powder


Melting point: 170 – 175°C

Solubility in grams/100 grams of solvent:

MEK 1.12 grams

Xylene 1.53 grams

Cyclohexanone 1.64 grams

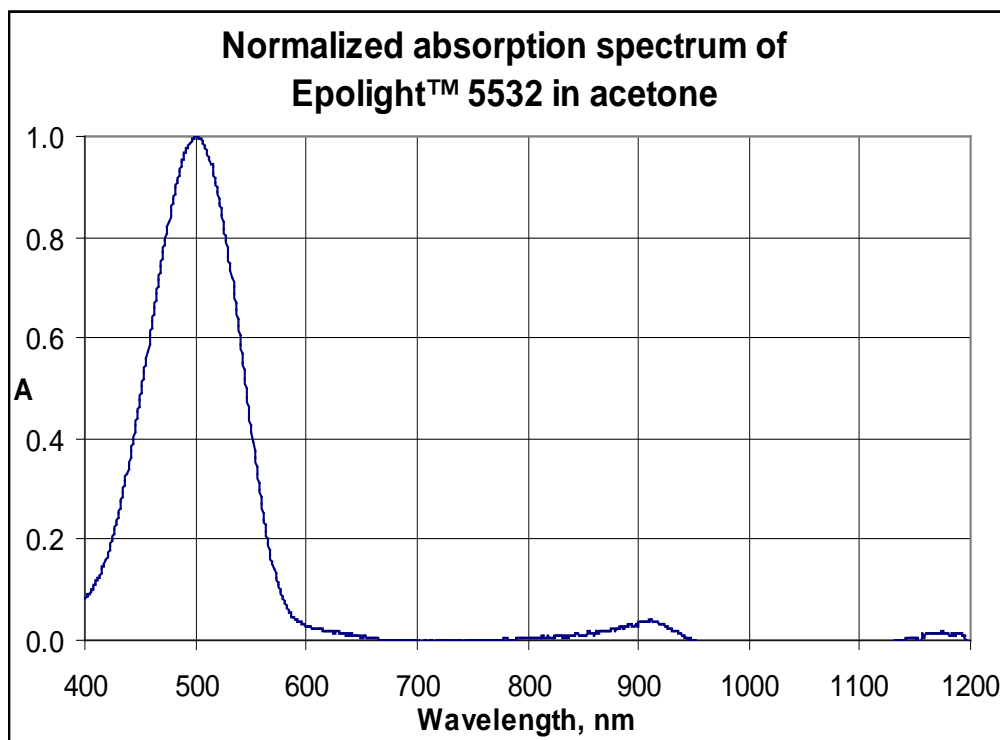

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.