

# Technical Data Sheet

## Epilight™ 5548 Near Infrared Dye

### DESCRIPTION

Suitable for injection molding

Suitable for coatings

Suitable for laminates

Very high absorptivity

### PROPERTIES

Absorption maximum,  $\lambda$  max: 777 nm

Absorptivity in acetone:  $326 \text{ L g}^{-1} \text{ cm}^{-1}$

Appearance: green powder


Melting point:  $255 - 258^\circ\text{C}$

Solubility in grams/100 grams of solvent:

MEK 6.59 grams

Xylene 0.16 gram

Cyclohexanone 7.0 grams

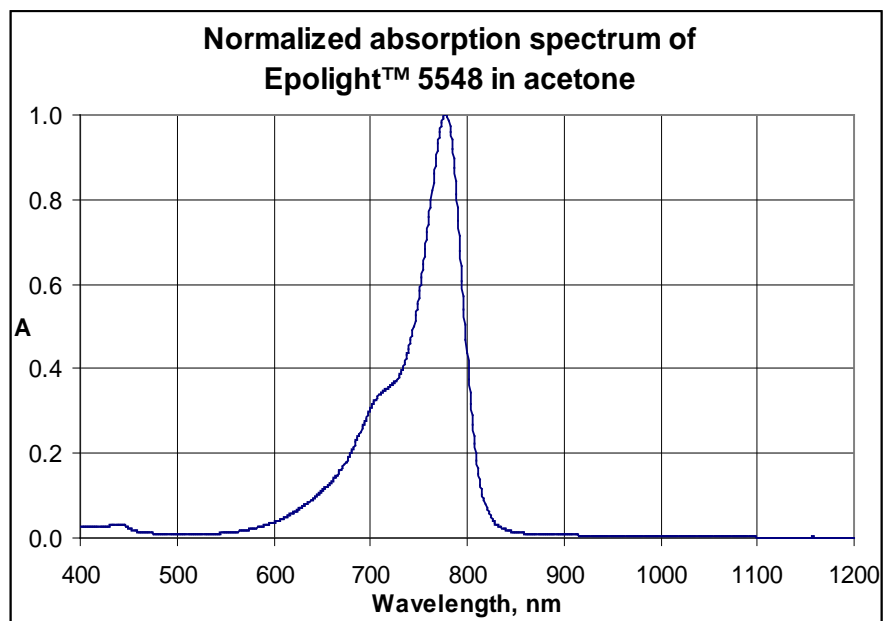

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.