

# Technical Data Sheet

## Luminate™ 7276A visible opaque compound

---

### DESCRIPTION

Ready-to-mold thermoplastic

Blocks light from 200-830 nm

Allows transmittance above 880 nm


Appearance: black polycarbonate pellet

Target transmittance values

- 5% at 830 nm
- 50% at 855 nm
- 80% at 880 nm

---

**Transmittance spectrum Luminate 7276A (2.54 mm)**

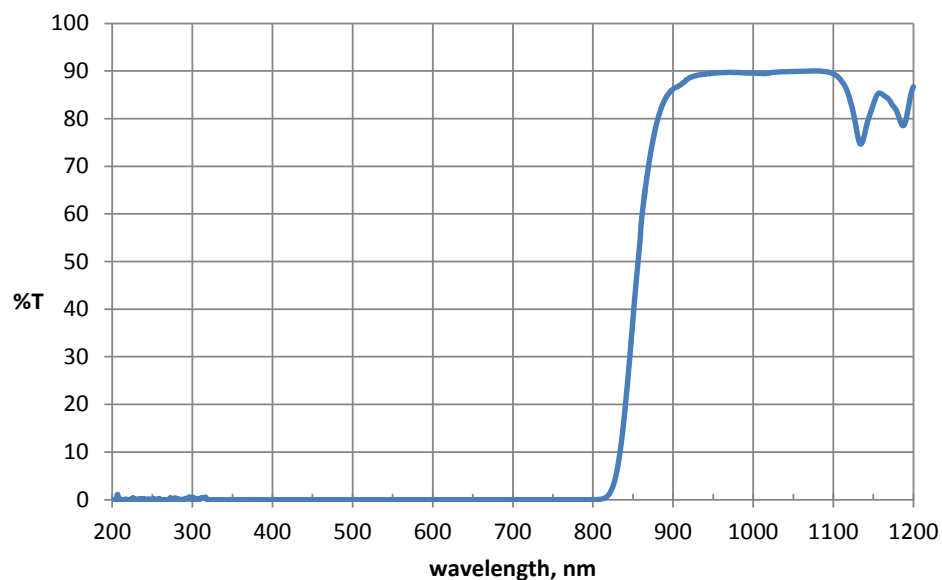

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.