

# Technical Data Sheet

## Luminate™ 7276E visible opaque compound

### DESCRIPTION

Ready to mold thermoplastic

Blocks light from 200 to 950 nm


Allows transmittance above 1050 nm

Appearance: black polycarbonate pellet

Target transmittance values

- 5% at 960 nm
- 50% at 1007 nm
- 80% at 1050 nm
- 83% at 1064 nm

**Transmittance spectrum Luminate 7276E (2.84 mm)**

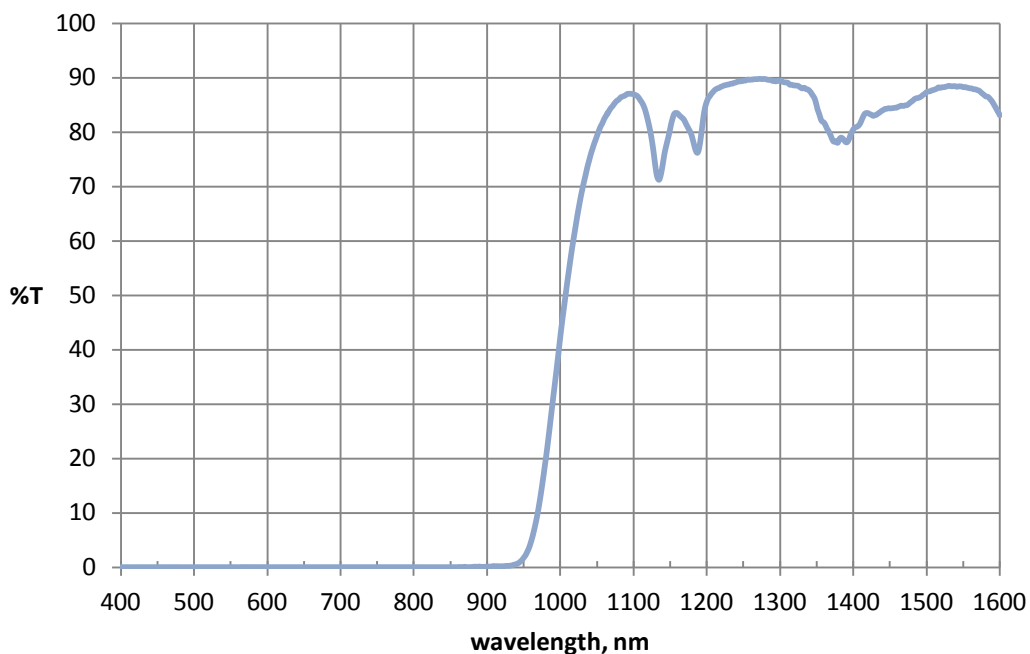

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.