

Technical Data Sheet

Luminate™ 7778 visible opaque compound

DESCRIPTION

Ready-to-mold thermoplastic

Blocks light from 200-650 nm


Allows transmittance above 720 nm

Appearance: black polycarbonate pellets

Target transmittance values

- 5% at 661 nm
- 50% at 687 nm
- 80% at 717 nm
- 85% at 744 nm

Transmittance spectrum of Luminate 7778 (1.0 mm)

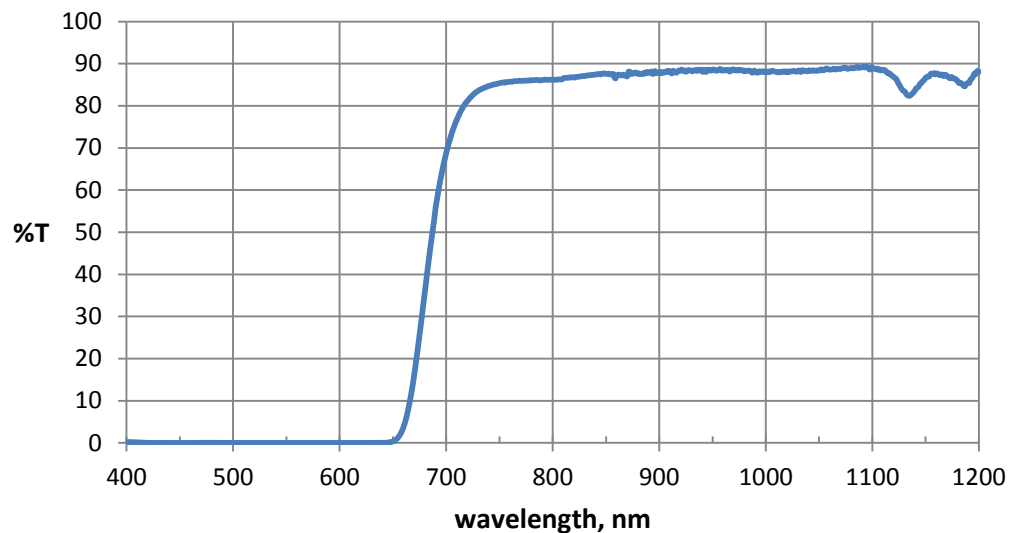

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.