



Technical Data Sheet

SS10-19A

DESCRIPTION

Ready to mold pellet

Suitable for injection molding

Meets ISO 16321-2:2021 Welding Shade 5

PROPERTIES

Meets ISO 16321-2

Maximum average transmittance 200-313nm: 0.0003%


Maximum average transmittance 313-365nm: 0.3%

Maximum average transmittance 365-400nm: less than luminous transmittance

Luminous average transmittance 380-780nm: 1.2-3.2%

Maximum average IR-A transmittance 780-1400nm: 3.5%

Maximum average Near IR transmittance: 780-3000nm: 3.5%

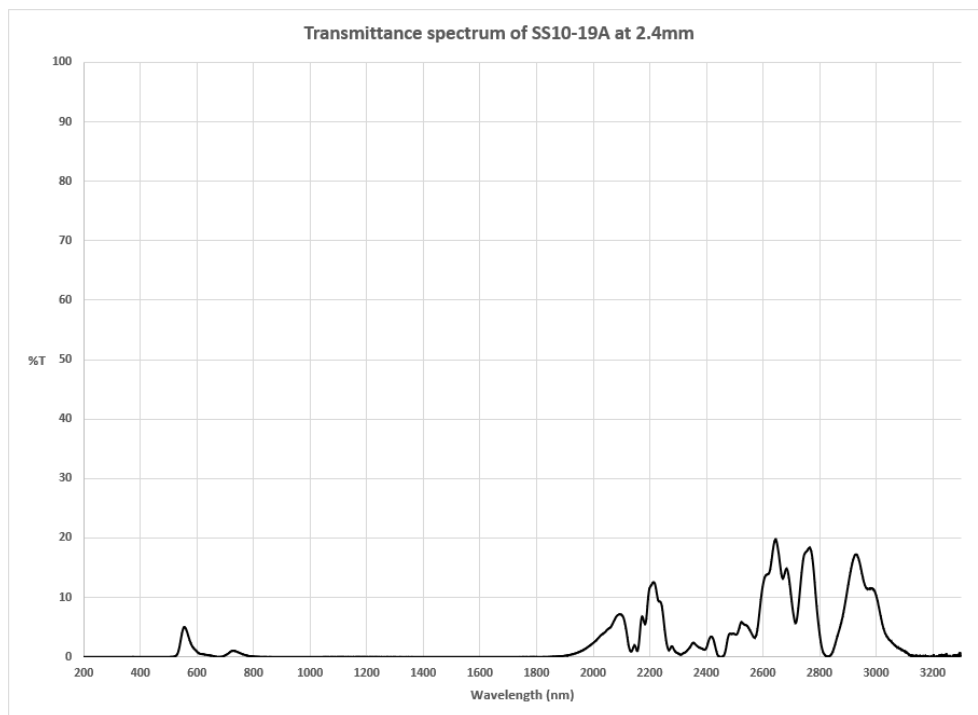

Important Disclaimer: The information provided is accurate to the best of Epolin's knowledge as of the date issued. Epolin may have relied on information provided by third parties (including its suppliers). Information provided relates only to the goods described and may not be valid where the goods are used in combination with other materials or in any process. The information is for guidance only. Buyer is solely responsible for final selection of the goods, determining if the goods are suitable, safe, effective and legal for use in Buyer's application(s), testing the goods in Buyer's application, and conducting any and all other evaluation Buyer deems necessary or appropriate to determine the suitability of goods and fitness for any intended use or purpose. Factors beyond Seller's control may affect or alter performance of the goods, including, but not limited to, Buyer's method of use, use of goods in combination with other materials, processing conditions, end-use applications, and environmental or other conditions affecting Buyer's finished product or that of Buyer's customers. **NO WARRANTY, EXPRESS OR IMPLIED, IS MADE OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR ANY OTHER WARRANTY REGARDING THE PRODUCTS OR THE INFORMATION PROVIDED.** Disclosure is not a license to nor an inducement to use goods in a manner that might infringe any patent.