



# Technical Data Sheet

## Epilight™ 2062 Near Infrared Dye

---

### DESCRIPTION

Excellent visible light transmission for a monovalent ammonium dye

Suitable for coatings

Suitable for injection molding

---

### PROPERTIES

Absorption maximum,  $\lambda$  max: 977 nm

Absorptivity in acetone: 70 L g<sup>-1</sup> cm<sup>-1</sup>

Appearance: green powder

Melting point: 98 - 102°C

Solubility in grams/100 grams of solvent:


MEK >6.0 grams

Ethyl acetate 2.18 grams

Cyclohexanone >6.0 grams

THF 5.8 grams

---

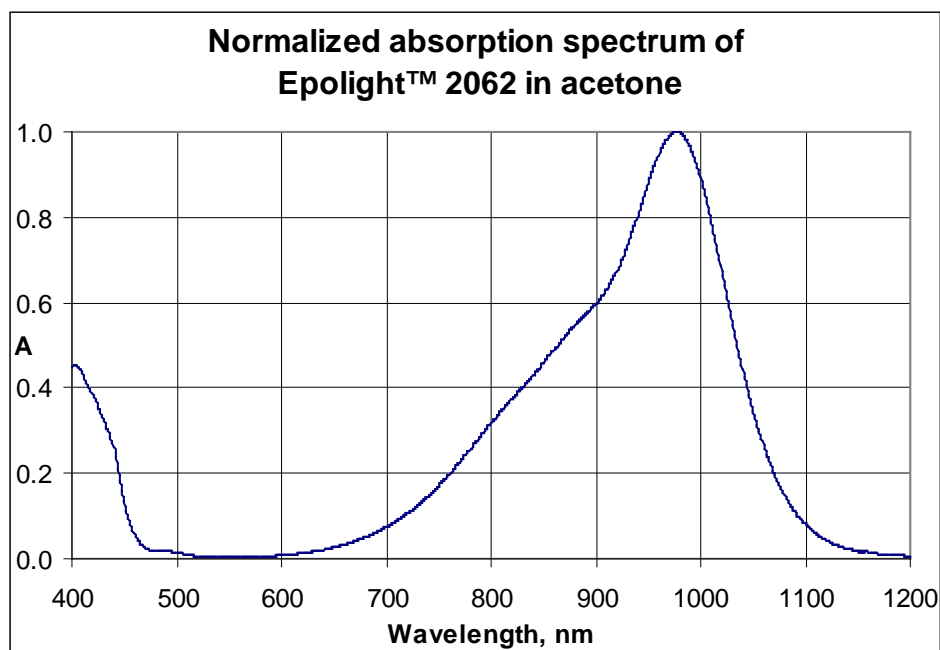

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin, Inc. makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin, Inc. be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.