Technical Data Sheet

Epolight™ 5393 visible dye

DESCRIPTION

Suitable for coatings and inks

Mild fluorescence

PROPERTIES

Absorption maximum, λ max: 543 nm in acetone

Absorptivity in chloroform: 200 L g-1 cm-1


Appearance: red or green powder

Melting point: > 300° C

Solubility in grams/100 grams of solvent:

MEK > 50
Xylene 0.0
Isopropanol 1.8
Cyclohexanone 5.0

absorbance spectrum of Epolight 5393 in acetone

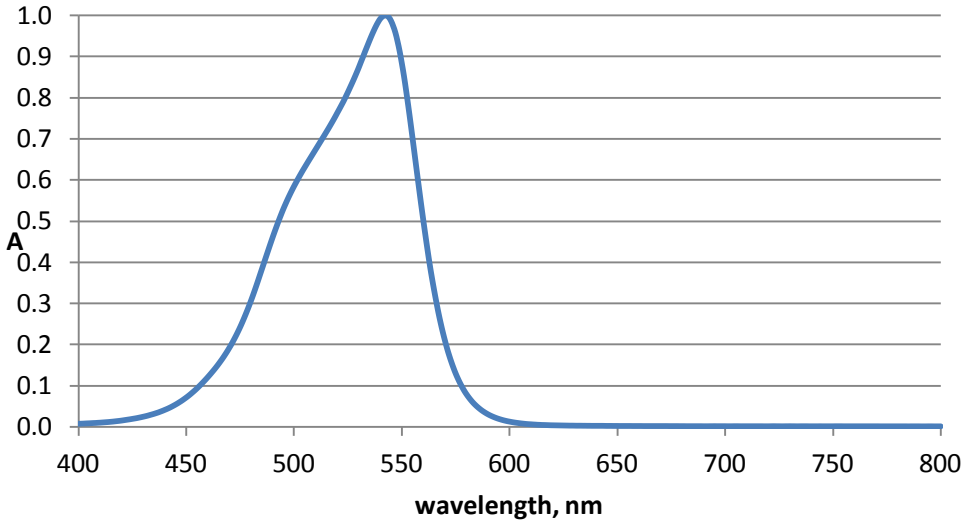

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.

© Epolin All Rights Reserved

Technical Data Sheet

Although the information in this data sheet is presented in good faith and believed to be correct, Epolin makes no representations or warranties as to the completeness or accuracy of the information which is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Epolin be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this data sheet or the products to which the information refers.

© Epolin All Rights Reserved